

WATER BASE

LeMaitre
Special Effects Inc.

H A Z E & F O G

G-300

Challenging all the limitations
that technology offers,



D.M.X. INTERFACE / REMOTE

we've taken fog machines
several steps further.

- DMX and Analog Control
- Continuous Output
- Full Function Digital Display
- Machine To Machine Link Connections
- Limited Lifetime Warranty
- Micro-Processor Controlled

Le Maitre G300 Water Base Fog And Haze Machine




The G300 is the most technically advanced fog machine available. Challenging all the limitations that technology offers, Le Maitre takes the fog machine several steps further. The G300 not only breaks all the technological advancements, but it also doubles as a hazer. By simply changing the mode on the digital display and the fluid in the machine, it safely doubles as a water base hazer. This feature never before available on a fog machine.

D.M.X. INTERFACE / REMOTE



The D.M.X. Interface is a replacement module for standard G300 Remote Control, which will allow standard D.M.X. data protocol to vary the Output Flow Rate, and activate smoke issue via separate channels. Both Smoke Activate and Flow Rate can be switched to Manual / Off / D.M.X. so that single channel control of the selected action can be effected while the remaining action is set manually.

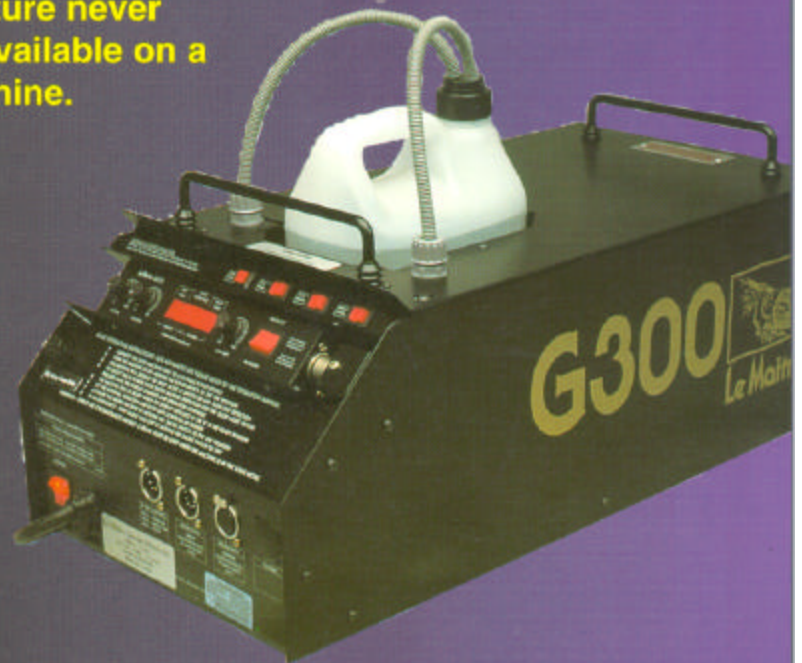

Specifications

Length	23.5"	590mm
Height	8.5"	220mm
Width	11.5"	290mm
Weight	43 lbs	19.5 kg
Voltage	115V / 60 Hz 18 amps	

Accessories

- Optional Flight Case
- 4" Ducting Hose Adaptor
- LSG Internal module
- Silencer Kit
- D.M.X. Interface / Remote

Features

- Micro-Processor System Management
- Twin Pump Fluid Feed
- High Accuracy Linearised Platinum Rod Thermal Sensor
- 4 Litre Fluid Tank
- Continuous Output (Micro-Processor Controlled)
- D.M.X. Compatible (Optional)
- Multi-Digit Display Of All Controls And Status
- Instant Display Of Any Adjusted Control
- Soft Start Smoke Issue For Ultimate Control
- Mechanical "Fail-Safe" For Highest Temperature Fail
- Open And Short Circuit Power Triac Failure Sensing Protection
- Machine To Machine Opto-Isolated XLR Link Connections
- On Board Remote Control Docking Facility
- Timer Facility Duration 0-8 Minutes / Interval From 0-20 Minutes
- Single Channel 0-10 Volt "Smoke On" Control Of All Linked Machines
- Separate 0-10 Volt Smoke Switch, And Vari-Flow Inputs (4 Pin XLR)

LeMaitre
Special Effects Inc.

2528 Beach Road Port Huron, Michigan USA 48060
546 Sovereign Road London, Ontario CANADA N5V 4K5
(519) 659-7972 FAX (519) 659-7713